



Pressure Control Equipment

Phuel Telescopic Lubricator



The Phuel Telescopic Lubricator allows the user to reduce operational planning time, reduce the requirement for small lubricator lengths & offers real benefits in the event of line problems

The Phuel Telescopic Lubricator offers all the functionality you would expect from a wireline lubricator but with the added benefit of an adjustable overall length.

Now every available inch of riser height can be utilised without detailed operational planning or having to carry many individual lubricators.

The Phuel Telescopic Lubricator consists of four retracting locking dogs that locate into a grooved mandrel, providing 3ft of stroke with 12 x 3" increments. The dogs are safely retained with a locking sleeve and each one needs to be individually retracted, making the operation safe and secure.


A pair of T-Seals and wiper rings ensure that the sealing integrity is maintained no matter what position is selected.

The Phuel Telescopic Lubricator can be used for maximising the available length of tool string for restricted height platform operations or for long tool string operations like running tractors.

Now the riser can simply be stretched out to suit your needs

This riser is useful in fishing operations, where decreasing the height of the riser above the split point can help with cutting and clamping the wire without stripping through the closed wireline valve (BOP).

Many hours can be saved in coil tubing operations – the make-up of flanges at the top of the rig up can be accommodated without rigging down and spacing out again.

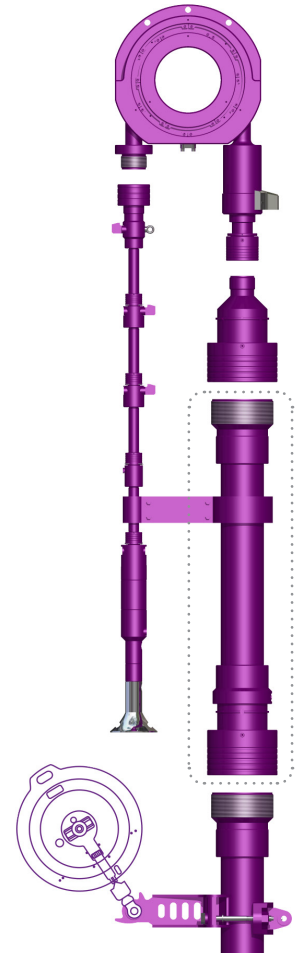

Wireline PCE Stack

Phuel Hi-Grip Collars as standard



Safe and easy access to the wireline.

In event of a problem, such as a stranded line, **The Phuel Telescopic Lubricator** can be unlocked and disconnected above the wireline valve.

This allows greater access to the wireline and affords the operator more options.




Pressure Control Equipment

Phuel Telescopic Lubricator

Saver Sub

Removable Saver Sub allows a worn thread to be easily replaced

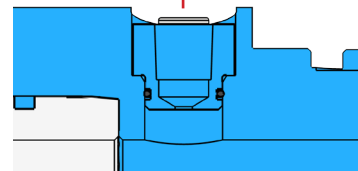

The Phuel Saver Sub provides the pressure test connection, and can be easily removed and replaced without the need to change the bottom sub. This ensures that the tool **stays in service longer.**

Industry standard end connections to suit your requirements and pressure rating



Housing is coated with Inner Armour to provide a wear and corrosion resistant surface

12 x 3 inch spacing intervals to provide maximum operational configuration

Phuel Saver Sub allows easy replacement of worn or damaged pressure connections

Phuel Safe Lok system for supporting the collar while stabbing in

Phuel Hi-Grip Collars offer purchase even when greasy

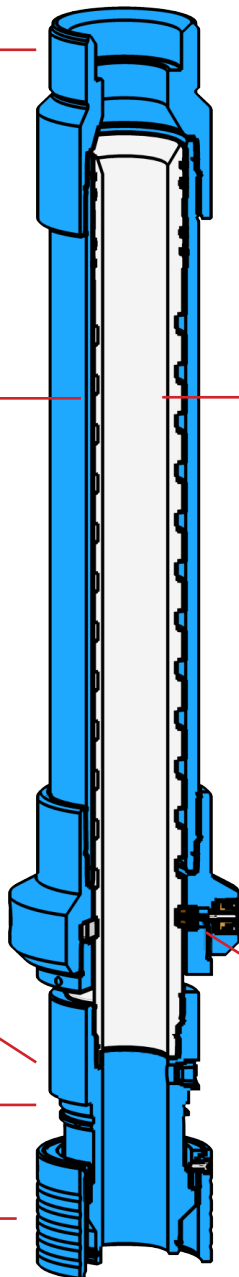

- Retractable Dogs
- Dust Seals
- Retracting Mechanism
- Locking Sleeve

Four individual dogs for increased operational safety

Product Options

- Fast Test Facilities are also available on Phuel Lubricators, Toolcatchers and Tool Traps

Key Ordering Information

Things to consider when requesting a quotation:

- Stroke length & Bore Size
- Connection type / size
- Maximum Working Pressure
- H2S or Standard Service